


# FSP120AAB 120 W AC/DC Adapter

**120W**

## Dimensions

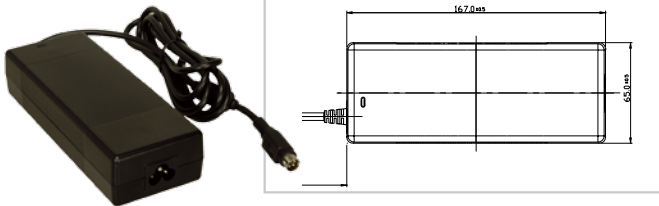

**\*\*Meet Eup**



## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 19 V
- Output Current: 6.32 A
- Output Watts: 120 W
- Efficiency: 86 %
- Operating Temperature: 0 °C ~ 40 °C
- Storage Temperature: -40 °C ~ 85 °C

## Optional Cable



## Connector Type



Plug Type: Power mini-DIN(4P)


## Ordering Information

| Part No.           | Description                               |
|--------------------|---|
| 63000-FSP120AAB-RS | 19 V 120W Power adapter; 90~264 Vac input |

# FSP060DBAB1 60 W AC/DC Adapter

**60W**

## Dimensions

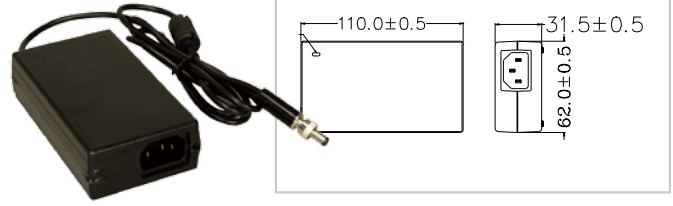


**\*\*Meet Eup**



## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 5 A
- Output Watts: 60 W
- Efficiency: 87 %
- Operating Temperature: 0 °C ~ 40 °C
- Storage Temperature: -20 °C ~ 65 °C

## Optional Cable



## Connector Type



Plug Type: øin 2.5 mm / øout 5.5 mm


## Ordering Information

| Part No.               | Description  |
|------------------------|--|
| 6300-FSP060DBAB1552-RS | 12 V 60W Power Adapter with lock screw 90~264 Vac input; Erp |

# UP0251E12PL 25 W AC/DC Adapter

**25W**

## Dimensions

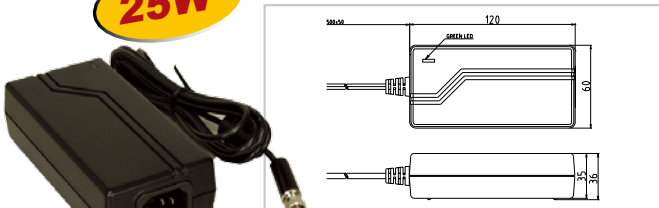


## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 2.1 A
- Output Watts: 25 W
- Efficiency: 85 %
- Operating Temperature: 0 °C ~ 40 °C
- Storage Temperature: -40 °C ~ 85 °C

## Optional Cable



## Connector Type



Plug Type: øin 2.5 mm / øout 5.5 mm


## Ordering Information

| Part No.               | Description  |
|------------------------|--|
| 63000-UP0251E12PL59-RS | 12 V 25W power adapter with lock screw; 90~264 Vac input |

# FSP036RAB 36W AC/DC Adapter

**36W**

## Dimensions

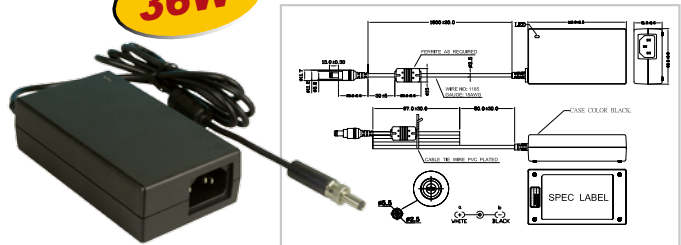


**\*\*Meet Eup**




## Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 3 A
- Output Watts: 36 W
- Efficiency: 84.7 %
- Operating Temperature: 0 °C ~ 40 °C
- Storage Temperature: -20 °C ~ 80 °C

## Optional Cable



## Connector Type



Plug Type: øin 2.5 mm / øout 5.5 mm

## Ordering Information

| Part No.             | Description                                 |
|----------------------|---|
| 6300-FSP036RAB610-RS | 12V 36W Power adapter; 90~264VAC input; Erp |

1 Industrial Computing Solutions

2 Embedded Computing Solutions

3 Industrial Data Collector and Controller

4 Video Capture Solutions

5 I/O Communication Solutions

6 Panel Solutions

7 ORing Network Communication

8 Power Supply/Peripherals