

ACE-A627A


270 W 1U Type ATX Power Supply



Meet 80 Plus



Dimensions

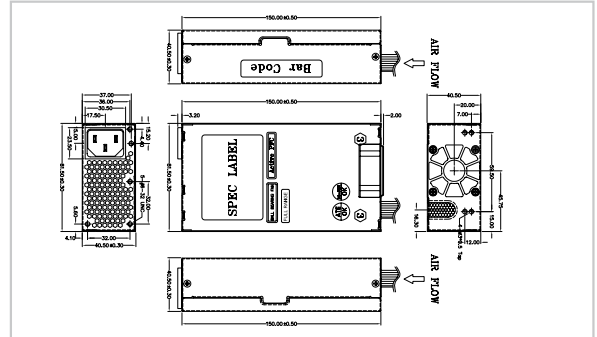

Specifications

Product	ACE-A627A-RS					
Input Type	90~264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	16 A (0.5 A min.)	18 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
Efficiency	80 %					
Temperature	Operating : 0 °C ~ 50 °C Storage : -20 °C ~ 80 °C					
MTBF(hrs)	100,000 hr					
Output Connector	20-pin ATX, 4-pin 12 V, FDD and 3 x HDD					
Dimensions	150 x 81.5 x 40.5 (mm)					

Ordering Information


Part No.	Description
ACE-A627A-RS	270W AC-DC 1U flex ATX Power Supply , with PFC

ACE-4525AP

250 W 1U Type ATX Power Supply



Dimensions

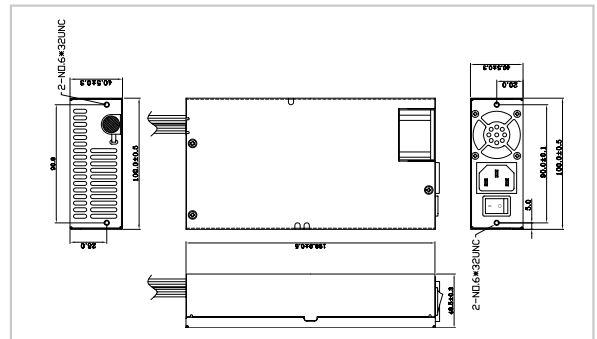

Specifications

Input Type	90~265 V AC Full Range Input					
Output Voltage	+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	16 A (0.5 A min.)	16 A (0.5 A min.)	16 A (0.5 A min.)	16 A (0.5 A min.)	0.5 A (0 A min.)	2.5 A (0.1 A min.)
Efficiency	70 %					
Temperature	Operating : 0 °C ~ 50 °C Storage : -20 °C ~ 80 °C					
MTBF(hrs)	100,000 hours on max load at +25 °C					
Output Connector	20+4-pin ATX, 4-pin 12 V, 4 x HDD, 2 x SATA and 1 x FDD					
Dimensions	190 x 100 x 40.5 (mm)					

Ordering Information

Part No.	Description
ACE-4525AP-RS	250W AC-DC 1U ATX Power Supply, with PFC

1 Industrial Computing Solutions

2 Embedded Computing Solutions

3 Industrial Data Collector and Controller

4 Video Capture Solutions

5 I/O Communication Solutions

6 Panel Solutions

7 ORing Network Communication

8 Power Supply/ Peripherals