



PAC-1000G

6-slot Full-size Compact Chassis

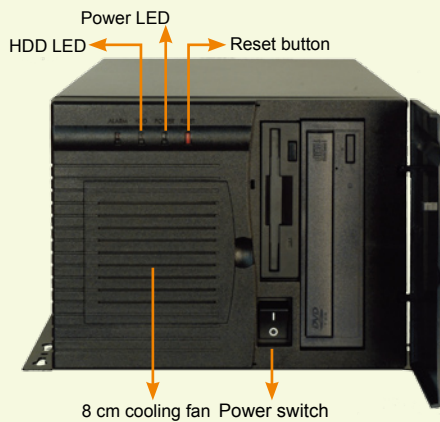

CD-ROM, and HDD are not included in package.

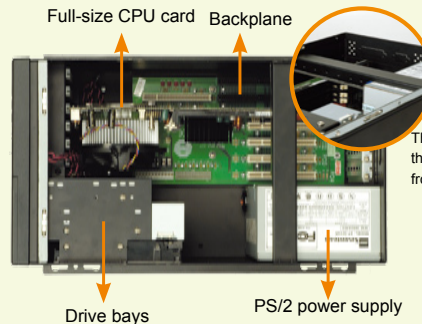

The hold-down clamp is designed to secure the cards within the chassis, protecting them from vibration.



Features

- ◆ RoHS compliant design
- ◆ One, 8 cm cooling fan with replaceable fan filter
- ◆ Plastic front panel with cover door


Specifications

◆ Construction	Metal with plastic front panel
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x front- accessible 3.5" 1 x 5.25" 1 x 3.5" HDD
◆ Cooling Fans	1 x 8cm
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Buttons	power switch, reset
◆ Operating Temperature	0°C~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/ Gross)	5.6 kg / 8.8 kg
◆ Dimension (DxWxH)	421 mm x 232 mm x 176 mm

Ordering Information

Part No.	Description
PAC-1000GB/ ACE-832AP	6-slot full-size chassis, black, with ACE-832AP-RS, RoHS

Dimensions measurement units: millimeter

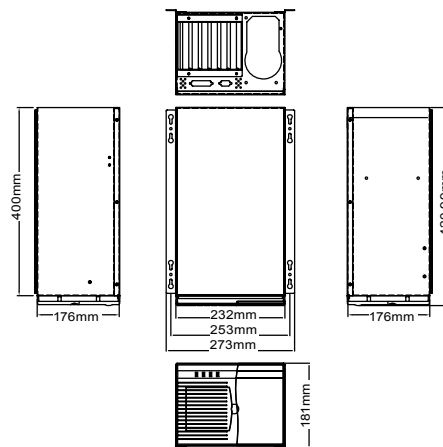

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-6S-RS	ISA	0	6	0	0	0	0	AT
IP-6S-RS	PCISA	3	2	0	0	0	0	AT
IP-6SA-RS	PCISA	3	2	0	0	0	0	ATX
PCI-6S-RS	PICMG 1.0	4	2	0	0	0	0	AT/ATX
PCI-5S-RS	PICMG 1.0	3	1	0	0	0	0	AT/ATX
*PE-6S2	PICMG 1.3	3	0	0	1	0	1	ATX
*PE-6S3	PICMG 1.3	1	0	3	0	0	1	ATX
SPE-4S	PICMG 1.3	0	0	0	1	2	0	ATX
SPE-6S	PICMG 1.3	0	0	0	5	0	0	ATX

*Only R20 or later version can support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-940AP-RS	390W
ATX	ACE-832AP-RS	300W
	ACE-841AP-S-RS	400W
	ACE-828V-RS	250W

PAC-1000G can support single PS/2 PSU. For more models of IEI PSU, please refer to section 8 or visit www.ieiworld.com.

1

Industrial Computing Solutions

2

Embedded Computing Solutions

3

Industrial Data Collector and Controller

4

Video Capture Solutions

5

I/O Communication Solutions

6

Panel Solutions

7

ORing Network Communication

8

Power Supply/ Peripherals