

Power Supply

PS/2 DC Input AT Type

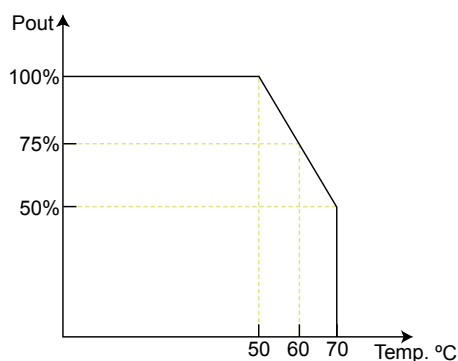
ACE-925C DC 24 V

220W


Input Type	19 ~ 30VDC					
Output Voltage	+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb
		25 A (4 A min)	6 A	1 A	2 A	
Efficiency	65 %					
Temperature	0 °C ~ 50 °C (Operating), -40 °C ~ 75 °C (Storage)					
MTBF(hrs)	200,000					
Output Connector	P8+P9 x1, HDD/CDROM x3, FDD x2					

Ordering Information

Part No.	Description
ACE-925C-RS	220 W 24 V DC input PS/2 Type AT Power Supply

ACE-925C


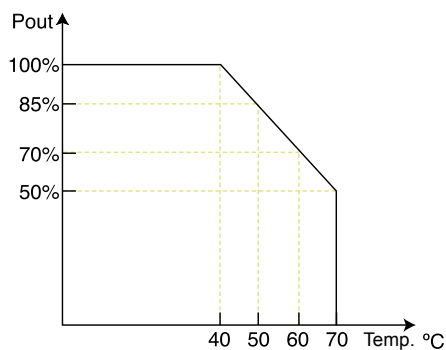
ACE-932T DC -48V

300W


Input Type	-40 ~ -70 VDC					
Output Voltage	+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb
		33 A (1A min)	8 A	0.5 A	3 A	
Efficiency	70 %					
Temperature	-20 °C ~ 70 °C (Operating), -40 °C ~ 75 °C (Storage)					
MTBF(hrs)	140,000					
Output Connector	P8+P9 x1, Extra +5V(P10) x1, HDD/CDROM x4, FDD x2					

Ordering Information

Part No.	Description
ACE-932T-RS	300W -48 V DC input PS/2 Type AT Power Supply

ACE-932T

1
Industrial
Computing
Solutions

2
Embedded
Computing
Solutions

3
RISC-Based
Embedded
Solutions

4
Industrial
Data
Collector/
Server
Solutions

5
Industrial
Data
Collection

6
I/O
Communication
Solutions

7
Panel
Solutions

8
Power Supply/
Network
Communication/
Peripherals