

LKM-926G/9268G

15" LCD Monitor/ Keyboard/ Mouse/ Speaker/ KVMA switch 5-in-1 1U Height Drawer



No special cables required, up to 8 computers connection!

No special cables required to connect up to 8 computers!
Five functions: LCD monitor, keyboard, mouse, speaker and KVMA switch



LKM-9268G
Two self-click prevents the keyboard from sliding in shaking

Main Features



1. Outstanding LCD Module : Channel change control, auto scan control, programmable station name.
2. KVMA Switch : 8 port KVMA switch can be manually or automatically set via LCD module
3. Standard support of English version keyboard. Optional Japanese, German, French, Italian version keyboard support.
4. Embedded speaker can support alarm warning notice or audio application
5. Hot Pluggable - Add or remove computers without having to power down the switch

Specifications

1U Height designed to save RACK space

Computer Connections	LKM-926 series =1, LKM-9268 series = 8
LCD size	15" high brightness TFT LCD
Resolution (H x V)	1024 x 768 (XGA)
Luminance (cd/m ²)	350 cd/m ²
Display Color	262K
Pixel Pitch (mm)	0.297
Contrast Ratio	400:1
View Angle (H/V)	120/100
LCD MTBF	50000 hrs
Keyboard and Key Pad	88 standard keys with stouch pad supports English, Japanese, German, French, Italian keyboard
Alarm / Audio function	Available via two internal speakers (1W, with audio on/off switch)
OSD	Built-in OSD (On screen display) for user adjustments, including H/V position, color, Size, ...etc
Power Adapter	45W
Color	Standard color are black (Pantone black C) or white (Pantone black 413C)
Vibration	5~17Hz, 0.1" double amplitude displacement 17~640Hz, 1.5G acceleration peak to peak
Shock	10G acceleration peak to peak (11ms)
Temperature	0°C ~ 50°C
Humidity	5-95%, non-condensing
Dimensions (WxHxD mm)	482 x 323.25 x 520
LCM	8 Port KVMA models only

Dimensions

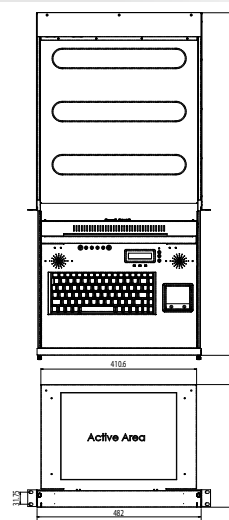

Outstanding LCD Module
· Display station number
· Auto scan or user manually selected setting

Ordering Information

LKM-926G [C] - [L]	Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set.AC Input
LKM-926G [C] T - [L]	Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set. 48VDC input
LKM-926G [C] - [C] - [L]	Single Input 15" LCD/Keyboard/Mouse/Speaker 1U drawer includes 1.1M length cable set. 24VDC input
LKM-9268G [C] - [L]	8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, AC input
LKM-9268G [C] T - [L]	8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, 48VDC input
LKM-9268G [C] - [C] - [L]	8 input 15" LCD/Keyboard/Mouse/Speaker 1U drawer, 24VDC input

[C] Color Code B: Black W: White
[L] Language Code EN: English, JP: Japanese, DE: German, FR: French, IT: Italian, TW: Traditional Chinese, SP: Spanish, RU: Russian

Packing List

2 x RACK Mount bracket. spcc (P/N: 41020-009501-00-RS)	2 x RACK Mount bracket. spcc (P/N: 41020-009001-01-RS)
1 x 1.8M Cable set, include VGA, Keyboard, Mouse, Audio Cable (P/N: LKM-CB18A-RS)	1 x Power supply.UP04501E-12P64L.45 watt AC/DC Adapter.90 VAC to 264 VAC, W/core (P/N:63SPU45E201-000-RS)
1 x 175cm round cable power cord (P/N: 32000-000002-RS)	

Options

LKM-CB18A-RS	1.8M cable set; includes VGA, Keyboard, Mouse and Audio cable.
LKM-CB30A-RS	3.0M cable set; includes VGA, Keyboard, Mouse and Audio cable.
LKM-CB50A-RS	5.0M cable set; includes VGA, Keyboard, Mouse and Audio cable.

1 Automation

2 Point of Service

3 Digital Signage

4 RISC-based Solutions

5 Medical Solutions