
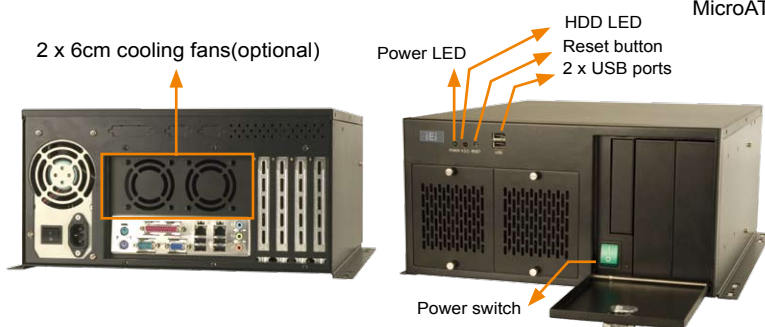


# PAC-130GATX

Compact Chassis for MicroATX Motherboard

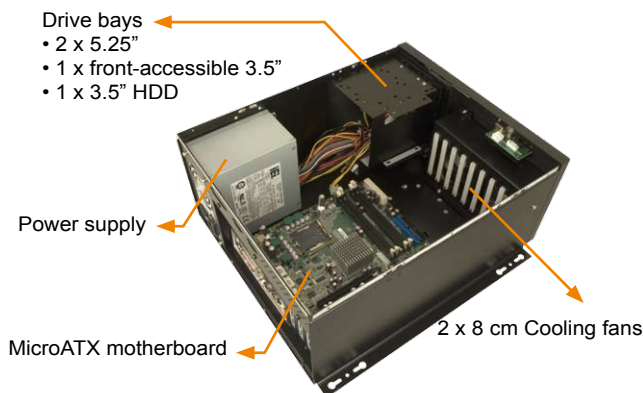

## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ Two, 8 cm hot swappable cooling fans with fan filter
- ◆ Two 5.25" drive bays
- ◆ One 3.5" drive bay and one internal 3.5" HDD bay


## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	microATX motherboard
◆ Drive Bays	2 x 5.25"
	1 x front accessible 3.5" 1 x 3.5" HDD
◆ Cooling Fans	2 x 8 cm , 2 x 6 cm (optional)
◆ I/O Ports	2 x USB
◆ I/O openings	1 x LPT , 2 x COM
◆ Expansion Slots	4 slots
◆ Indicators	Power, HDD
◆ Button	Power switch, reset
◆ Operating Temperature	0°C~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	8 kg / 11 kg
◆ Dimensions (DxWxH)	420 mm x 350 mm x 176 mm

## Ordering Information

Part No.	Description
PAC-130GBATX/ACE-832AP	Compact chassis for microATX motherboard, with ACE-832AP-RS, RoHS
PAC-130GB/ACE-832AP	10-slot full-size compact chassis, with ACE-832AP-RS, RoHS

## Dimensions

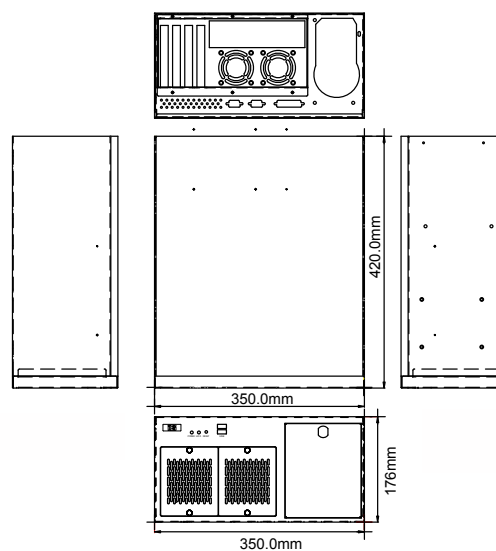

## Motherboard Options

Form Factor	Model No.	CPU Type
MicroATX	IMB-8550	Intel Pentium M/ Celeron M
	IMB-9454	Intel Pentium D/4/Celeron D
	IMB-9452	Intel Core Duo/Solo
	IMB-9154	Intel Pentium 4/ Celeron D

## Backplanes for PAC-130G

Model No.	SBC Type	PCI	ISA	PSU Connector
BP-8S-RS-R41	PICMG 1.0	0	8	AT
BP-10S-RS-R40	PICMG 1.0	0	8	AT
PCI-8S-RS-R40	PICMG 1.0	4	3	AT/ATX
PCI-10S-RS-R41	PICMG 1.0	4	5	AT/ATX
PX-8S-RS-R41	PICMG 1.0	6	2	AT/ATX
PX-10S-RS-R40	PICMG 1.0	7	3	AT/ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
ATX	ACE-832AP-RS	300W
	ACE-841AP-S-RS	400W
	ACE-850AP-RS	500W

PAC-130GATX can support single PS/2 PSU. For more models of IEI PSU, please visit [www.ieiworld.com](http://www.ieiworld.com).

1  
Industrial Computing Solutions

2  
Embedded Computing Solutions

3  
RISC-Based Embedded Solutions

4  
Industrial Data Collector/ Server Solutions

5  
Video Capture Solutions

6  
I/O Communication Solutions

7  
Panel Solutions

8  
Power Supply/ Network Communication/ Peripherals