


# PM-US15W

PCI-104 Intel® Atom™ Z510/Z530 CPU board with 18/24 bit LVDS, USB, CF

- Intel® Atom™ Z510/Z530 Processor up to 1.6GHz
- PLX PEX8112 PCIe to PCI bridge support PCI-104 Add-on card
- Single channel 18/24 bit LVDS supported
- CF type II and 4 x USB, 4 x COM supported
- Full hardware acceleration of H.264, MPEG2, VC1, and WMV9 is supported

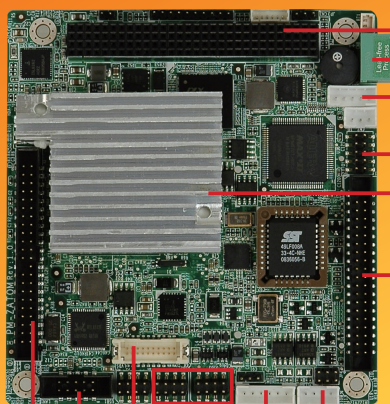

PCI-104 by PLX PEX8112  
PCIe to PCI Bridge




5V Power input  
Inverter

Digital I/O

Low Profile  
heatsink  
8mm height only

4 x RS232

Solder Side




CF type II DDR2  
400/533MHz

IDE LAN 4 x USB KB/MS RS-422/485  
18/24 bit LVDS

75+ % reduction in TDP\*\*  
Hyper-Threading Technology  
Performance-Per-Watt leadership

5V only, AT/ATX support

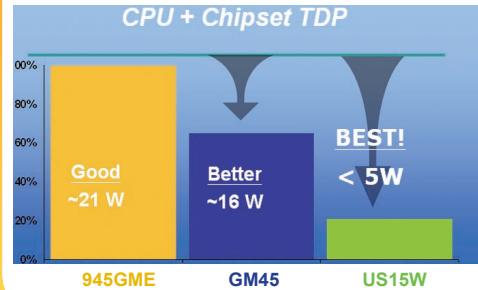

FSB  
533

DDR2  
533

Fanless



## Specifications

- ◆ CPU  
Intel® Atom™ Z510 1.1GHz with a 400MHz FSB w/o HT support  
Intel® Atom™ Z530 1.6GHz with a 533MHz FSB w/ HT support
- ◆ System Chipset  
Intel® US15W
- ◆ BIOS  
AMI BIOS
- ◆ System Memory  
1 x 200-pin single channel DDR2 SO-DIMM 400/533MHz up to 2GB
- ◆ Ethernet  
10/100Mbps Realtek RTL8102E Ethernet chipset (PCIe Interface)
- ◆ I/O Interface  
4 x RS-232  
1 x RS-422/485 (Shared with COM2)  
4 x USB 2.0  
1 x IDE  
1 x KB/MS  
1 x CF type II Socket
- ◆ Expansion  
PC-104 Slot (PCI BUS)
- ◆ Digital I/O  
8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Super I/O  
SMSC 3114NU
- ◆ Display Interface  
18/24-bit single channel LVDS  
VGA support by LVDS to VGA Module (LVDS-VGA-R10)
- ◆ Audio  
7.1 channel HD audio kit with Realtek ALC883 codec supports dual audio streams
- ◆ Watchdog Timer  
Software programmable supports 1 ~255 sec. System reset
- ◆ Power Supply  
5V only, AT/ATX support
- ◆ Power consumption  
5W@1.84A (Intel® Atom™ Z510 1.1GHz with 1GB DDR2)
- ◆ Temperature  
operating: 0°C ~ +60°C
- ◆ Humidity  
operation: 5% ~95%non-condensing
- ◆ Dimensions  
96 mm x 90 mm
- ◆ Weight  
GW: 650g / NW: 250g


## Packing List

1 x PM-US15W single board computer	
1 x Mini jumper pack	
1 x IDE flat cable 44p/44p (P/N: 32200-000009-RS)	
1 x Four ports RS-232 cable (P/N:32200-025401-RS)	
1 x RS-232/422/485 cable (P/N: 32200-026501-RS)	
2 x Dual USB ports cable (P/N: 32000-070300-RS)	
1 x Utility CD	1 x QIG

## Ordering Information

Part No.	Description
PM-US15W-Z530-R10	PCI-104 SBC Intel® Z530 1.6GHz with LVDS, USB, CF, 4COM
PM-US15W-Z510-R10	PCI-104 SBC Intel® Z510 1.1GHz with LVDS, USB, LAN, CF, 4COM
LVDS-VGA-R10	LVDS to VGA converter board
AC-KIT883HD-R10	7.1 channel HD audio Kit with realtek ALC883 codec support dual audio streams
ITS-44-R10	2.5" IDE to SATA module

## ITS-44 2.5" IDE to SATA Module

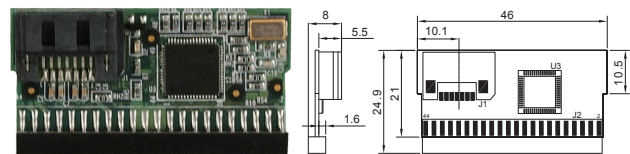

- 2.5" IDE to SATA module
- Converts standard SATA to IDE interface
- Chipset: JMicron JM20330
- Compliance to serial ATA generation1
- ATA/ATAPI PIO mode 0 to 4
- ATA/ATAPI Ultra DMA transfer rate up to 133MB/s
- Dimensions: 46(L) mm x 24.9(W) mm

## Packing List

1 x ITS-44 daughter card
1 X SATA data cable (P/N: 32000-062800-RS)
1 x QIG (Quick Installation Guide)

## Ordering Information

Part No.	Description
ITS-44-R10	2.5" IDE to SATA Module, RoHS



### Headquarters

威強工業電腦股份有限公司 IEI Technology Corp.  
No. 29, Jhongsing Rd., Sijih City, Taipei County, 221, Taiwan  
TEL : +886-2-86916798 FAX : +886-2-66160028  
sales@ieiworld.com www.ieiworld.com

### America

IEI Technology USA Corp.  
168 University Parkway, Pomona, CA 91768  
TEL : +1-909-595-2819 FAX : +1-909-595-2816  
sales@usa.ieiworld.com www.usa.ieiworld.com

### China

威強工業電腦 IEI Technology SH Corp.  
上海市闵行区宜山路 1728 号 3 楼.  
3F No. 1728 Yi-Shan Road, Min-Hang, ShangHai, China  
TEL : +86-21-3462-7799 FAX : +86-21-3462-7798,3462-7797  
sales@ieiworld.com.cn www.ieiworld.com.cn