


# PR-1300G

## 3-slot Half-size Compact Chassis



FDD and HDD are not included in package.

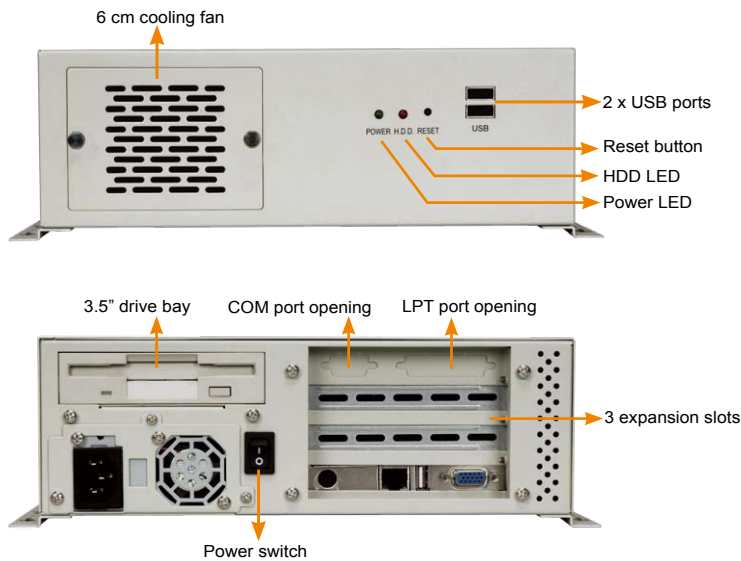

### Features

- ◆ RoHS compliant design
- ◆ One 3.5" drive bay
- ◆ Two USB ports on the front panel
- ◆ One, 6 cm cooling fan


### Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" (front accessible / HDD)
◆ Cooling Fans	1 x 6 cm
◆ I/O ports	2 x USB
◆ I/O openings	1 x LPT , 1 x COM
◆ Expansion Slots	3 slots
◆ Indicators	Power, HDD
◆ Button	Power switch, reset
◆ Operating Temperature	0°C~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	2.6 kg / 5.2 kg
◆ Dimensions (DxWxH)	254 mm x 265 mm x 95.5 mm

### Ordering Information

Part No.	Description
PR-1300GW/ACE-916AP/BP-3S	3-slot half-size chassis, white, with ACE-916AP-RS and BP-3S-RS-R30, RoHS
PR-1300GW/ACE-916AP/IP-3S	3-slot half-size chassis, white, with ACE-916AP-RS and IP-3S-RS-R30, RoHS
PR-1300GW/ACE-4518AP/IP-3SA	3-slot half-size chassis, with ACE-4518AP-RS and IP-3SA-RS-R40, white, RoHS

### Dimensions

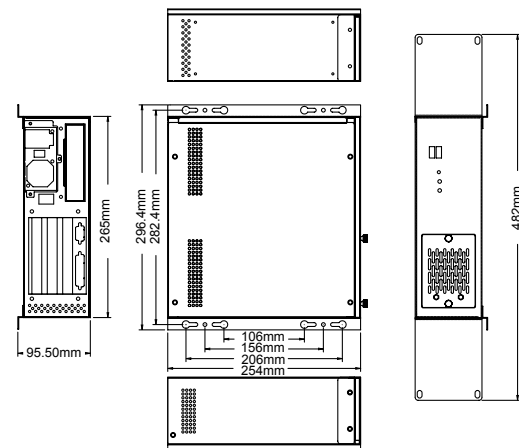

### Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-3S-RS-R40	ISA	0	3	0	0	0	AT
IP-3S-RS-R40	PCISA	2	0	0	0	0	AT
IP-3SA-RS-R40	PCISA	2	0	0	0	0	ATX

### Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-4518AP-RS	180W

PR-1300G can support single 1U height PSU. For more models of IEI PSU, please visit [www.ieiworld.com](http://www.ieiworld.com)

1  
Industrial  
Computing  
Solutions

2  
Embedded  
Computing  
Solutions

3  
RISC-Based  
Embedded  
Solutions

4  
Industrial  
Data  
Collector/  
Server  
Solutions

5  
Video  
Capture  
Solutions

6  
I/O  
Communication  
Solutions

7  
Panel  
Solutions

8  
Power Supply/  
Network  
Communication/  
Peripherals