

Specifications


SoC	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
Cache	L1:16K I-Cache, 16K D-Cache
Bus	16-bit x-ISA interface
BIOS	AMI BIOS
System Memory	128/256MB DDR2 Onboard
Watchdog Timer 0 & 1 Sets	Software programmable from 30.5µ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
Flash Disk Support	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
SRAM support	512KB (Optional)
I/O Interface	Enhanced IDE port x1 RS-232 port x1 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x2
Connectors	2.0mm 44-pin box header for IDE x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x2 2.0mm 10-pin box header for RS-232 x2 2.0mm 10-pin box header for USB x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin box header for Mouse x1 2.54mm 3-pin header for RS-485 x1 1.25mm 6-pin wafer for JTAG x1
Power Requirement	Single Voltage +5V @ 300mA
Weight	56g
Board Size	100 x 66mm (3.94 x 2.6 inches)
Operating Temperature	-20°C ~ +70°C -40°C ~ +85°C (Optional)

Packing List

- VSX-6116-V2 x1
- CD for User's Manual & Driver x1
- Cable
HDD 44P (2.0) x1
PRINT (2.0) x1
RS-232 (2.0) x2
USB (2.0) x1
GPIO (2.0) x2
PS2 KB White x1

Ordering information

- **VSX-6116-V2** Vortex86SX Tiny CPU Module with 128MB DDR2
- **ICOP-2720** Tiny VGA/LCD Development Kit

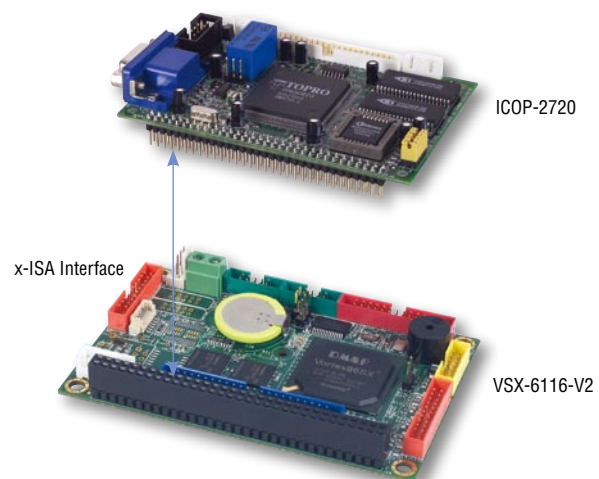

VGA function support via x-ISA interface

- 1 µProcessor Module
- 2 Mity/Tiny CPU Module
- 3 PC/104 CPU Module
- 4 Half-Size CPU Module
- 5 3.5" CPU Module
- 6 Peripheral Module
- 7 Display Product Series
- 8 Accessories & Technical Information